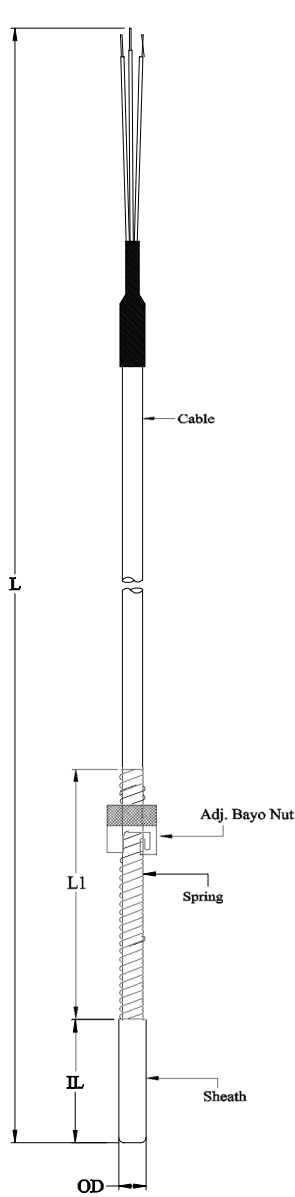


## RTD WITH CABLR & BYO NUT


**R-203**
**RTD Element**


A	Pt-100x1, Simplex
B	Pt-100x2, Duplex
O	Consult Factory

**Junction Style**


W2	2- Wire
W3	3- Wire
W4	4- Wire

**Sheath "OD"**


3	Ø3mm
4.5	Ø4.5mm
6	Ø6mm
8	Ø8mm

**Sheath Material**


316	SS 316
304	SS 304
Other	Consult Factory

**Spring Length "L1"**

**Insertion Length "IL"**

**Nominal Length of RTD (L)**

**Type of Cable**


A	Teflon/Teflon Insulated Flexible Cable
B	Teflon Insulated & SS Braided Flexible Cable
C	FG/FG Insulated Flexible Cable
D	PVC/PVC Insulated Flexible Cable
Other	Consult Factory

**Cable Length**


## Temperature Sensor Technology